


Installation Guide

Case components

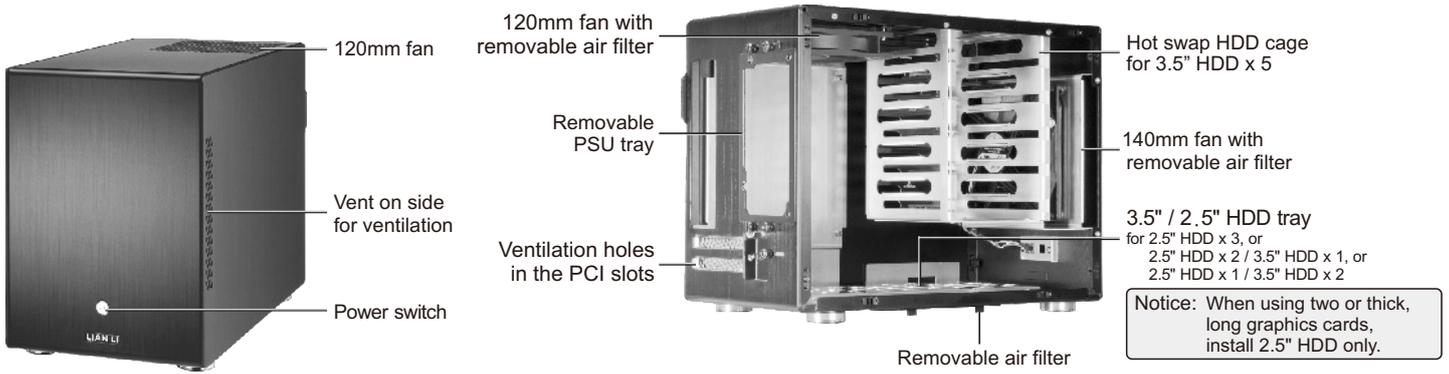

Notice: When using two or thick, long graphics cards, install 2.5" HDD only.

Hardware list

*Extra quantities are spare parts.


	Buzzer (1)		Screw M3*9.5 (12) for 2.5" HDD		Thumb screw (28) for 3.5" HDD		Screw (4) for M/B
	Cable ties (2)		Anti-vibration rubber-rings for 2.5" HDD or 3.5" HDD (12)		Rubber slide rail (10) for 3.5" HDD		Screw (4) for PSU mounting

Removing the side panels




Pull side panel out to remove.

Motherboard installation

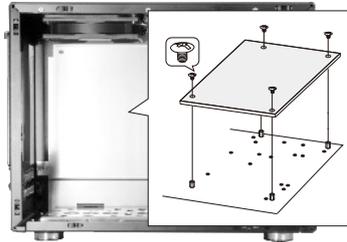


Place the M/B on the stand-off and fastened by the screws.

Removing the fan modules & air filters

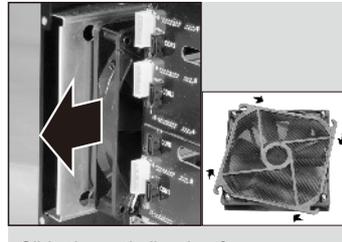


Slide the anti-vibration fan modules sideways to remove.

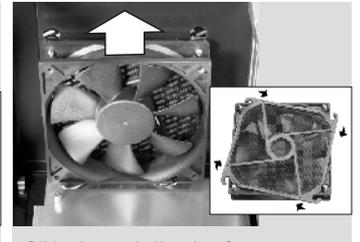


Slide the anti-vibration fan modules sideways to remove.


3.5" HDD installation

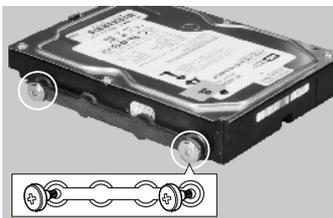

Install the screws to the HDD with anti-vibration rubber rings.

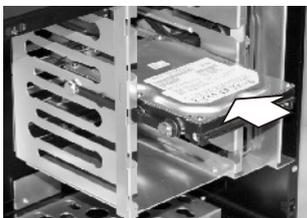


Slide the HDD into the HDD cage.

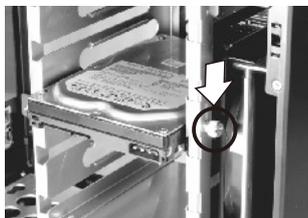

Close the gate to secure the HDD.

Removable air filter

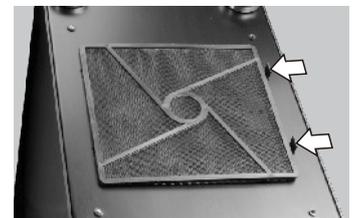


By press the plastic handles to release the air filter air filter is washable.


2.5" / 3.5" HDD installation




Loose thumb screws to remove the 2.5" / 3.5" HDD tray.




Install screws along with anti-vibration rubber rings onto the HDD.

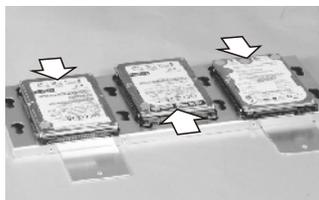

Slide the HDD into the holes on the HDD platform.



Install screws along with anti-vibration rubber rings onto the 3.5" HDD.

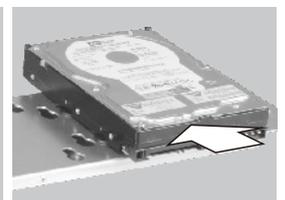


Slide the HDD into the holes on the HDD platform.


PSU installation




Loos four thumb screws to remove the PSU mounting bracket.

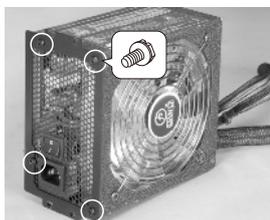

Assembly power supply with PSU mounting bracket.

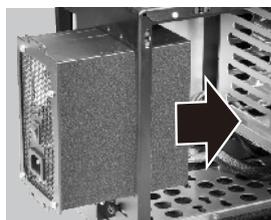

Push in gently.

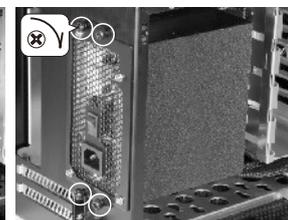

Fasten four thumb screws to the case to secure.

Cable installation guide

GROUND	WHITE	POWER SW
PWR	GRAY	
PLED-	WHITE	POWER LED
PLED+	GREEN	
Speaker	BLACK	SPEAKER
	NC	
+5V	RED	